

ASSEMBLY INSTRUCTION

Item# - 215709 - Solaria

PLEASE READ CAREFULLY AND SAVE THESE INSTRUCTIONS, AS YOU MAY NEED THEM AT A LATER DATE.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

GENERAL


Remove all parts and hardware from the box and the mounting package and make sure that none are missing by referencing the illustrations provided.

ASSEMBLY AND INSTALLATION

1. Drill two holes into the ceiling and insert plastic anchor (A). Then secure the mounting bracket (B) with mounting screws (C) until tight.
2. Connect the fixture to a suitable ground in accordance to local electrical codes. Before connecting the wires, make sure the power is shut off. Connect the wires to the terminals (see diagram below).



3. Neatly place all the wires.
4. Make sure that the wires do not come into contact with any hot parts of the lamp.
5. Position the canopy (E) onto the mounting bracket. Secure it by firmly tightening with the canopy screw (D) to hang the fixture (I).
6. If you want to adjust the drop length of the fixture you can adjust the wire from lock as shown in illustration.
7. Do not turn the power back on until installation is complete.
8. Install 4 (Four) light bulbs (K) (not included) into the holders (J).
9. Refer to the label on the lamp socket for Max Wattage information.
10. Installation is complete, turn on power at fuse or circuit breaker.

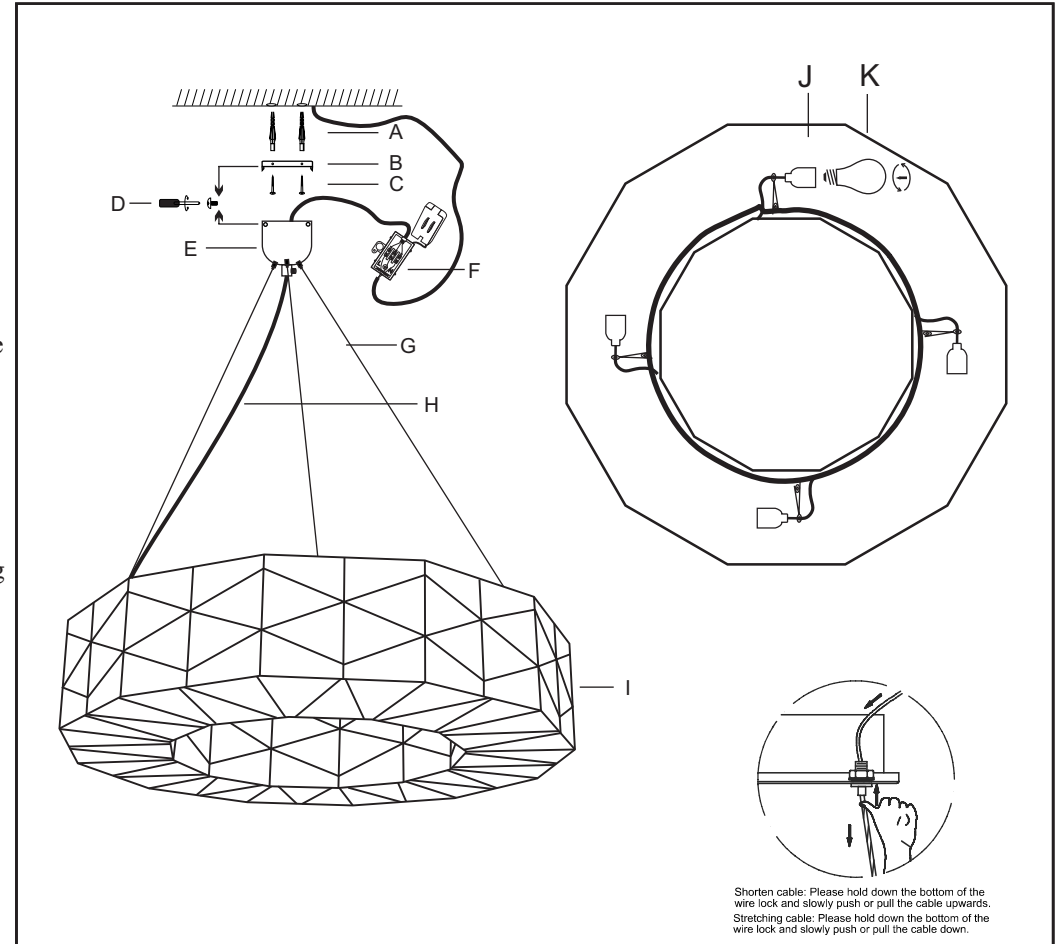

CONTENTS :

- A. PLASTIC ANCHOR (**NOT INCLUDED**)
- B. MOUNTING BRACKET (pre-attached)
- C. MOUNTING SCREW (pre-attached)
- D. CANOPY SCREW (pre-attached)
- E. CANOPY (pre-attached)
- F. TERMINAL BOX (pre-attached to wire)
- G. CLUTCH WIRE (pre-attached)
- H. WIRE (pre-attached)
- I. FIXTURE
- J. BULB HOLDER (pre-attached)
- K. BULB (**NOT INCLUDED**)